

3.5 BBL Single-Walled 2 Vessel Brewhouse



Assembly, Operation, & Maintenance

Congratulations on your purchase, and thank you for selecting the 3.5 BBL Single-Walled Brewhouse from Blichmann Engineering™. We are confident that it will provide you years of service and many gallons of outstanding beer. This manual will familiarize you with the use, assembly, and the sanitation procedures for the product.



IMPORTANT INFORMATION

PLEASE READ AND THOROUGHLY UNDERSTAND THIS MANUAL PRIOR TO USE FOR IMPORTANT SAFETY INFORMATION!

- WARNING:** Sections labeled “Warning” can lead to serious injury or death if not followed. Please thoroughly read these sections and understand them completely before use. If you do not understand them or have any questions, contact your retailer or Blichmann Engineering (www.BlichmannEngineering.com) before use.
- CAUTION:** Sections labeled “Caution” can lead to equipment damage or unsatisfactory performance of the equipment. Please read these sections thoroughly. If you have any questions, contact your retailer or Blichmann Engineering (www.BlichmannEngineering.com) before use.
- IMPORTANT:** Sections labeled “Important” should specifically be followed to ensure satisfactory results with the product.



IMPORTANT: Power demand for the brewhouse is 55A at 208V (three phase) or 79A at 240V (single phase). Select a main breaker setting for 20% above the appropriate amperage to avoid nuisance tripping or as directed by your local codes.

What’s In the Box?

Item Number	Description	Quantity	Item Number	Description	Quantity
BEPS-MLT-3.5BBL	3.5 BBL Mash Tun	1	BE-000868-00	Clamp Gasket 1.5"	11
BEPS-BK-HLT-3.5BBL	3.5 BBL Boil Kettle	1	BE-000633-00	1.5" Tri Clamp	11
BEPS-LIFTSTAND-3.5BBL	Kettle Stand	2	BE-000863-00	Tri Clamp Elbow 1.5"	4
	Control Panel - Single Phase	1	BE-001356-00	1.5" Multi Position Valve Tri Clamp	3
	Sanitary Heater Set of 3 - Single Phase	1	BE-001084-00	CIP Spray Ball	1
BEPS-PUMP-15HP	1/5hp Brewery Pump	1	BE-001186-00	1.5" Sanitary Pipe 6"	1
BEPS-CHILLER-2.0SQM	Chiller 3.5 BBL	1	BE-000630-00	Cap 1.5" Sanitary	1
BEPS-HoseKit-3.5-2V	3.5 Hose Assembly Kit	1	BE-001132-01	3.5 BBL Stand Pipe	1
BE-000957-00	CIP Spear 1.5" Tri Clamp	1	BE-000866-00	Clamp Gasket 2.5"	2
BE-000859-00	Cap 2.5" Sanitary	2	BE-000861-00	2.5" Tri Clamp	2

Assembly

Assemble the kettle stands as shown in the images below.

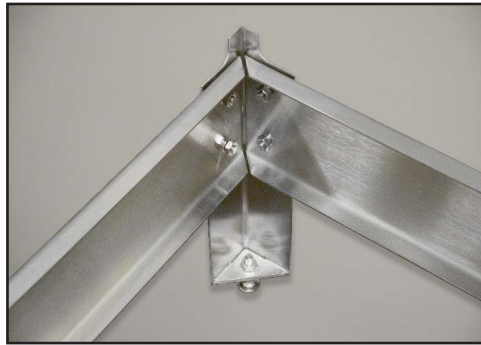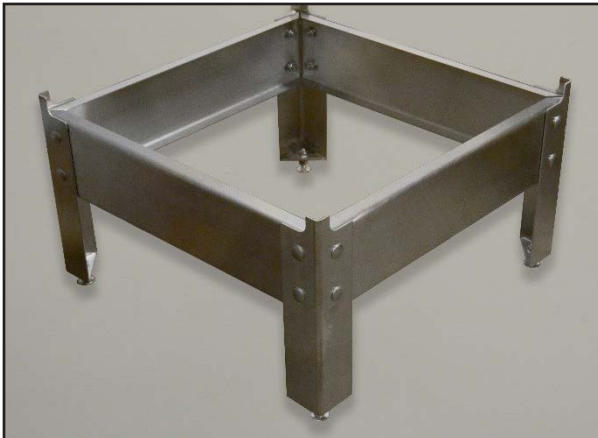

Attach the lifting arm to the holes in the mash kettle stand. Use the included allen wrench to tighten in place.



Kettle Placement & Fittings Installation

Place stands in the desired location. Use a level to ensure that the stand arms are level. Adjust the leveling feet as needed. It is recommended that you allow enough clearance between kettles and also on the sides and rear to allow personnel access for cleaning and service of the ancillary equipment. Although in practical use, the kettles can easily be slid out for any service needs.

Install valves and fittings as shown in the images below. Note that a 6" spool is added to the mash tun drain to allow the valve to swing under the stand so that a spent grain tote can be placed under the manway. It is not necessary to add the spool to the BK.



SPOOL FOR MASH TUN ONLY

Hoses

Length (1 inch ID)	Quantity
5 Feet	2
10 Feet	1

Construction:

- Tube: FDA white EPDM (non oily transfer applications)
- Reinforcement: Multiple plies of polyester tire cord with wire helix
- Cover: Grey EPDM
- Temperature Range: -40°F to +225°F
- Not for continuous steam service
- Stainless Steel 1.5 Inch Tri-Clamp ends

Note: that you can easily couple hoses together with a clamp and gasket to make long runs to fermentors etc.

Additional hoses can be purchased.




Place heating elements (3) into the boil kettle. Ensure the nuts on the element junction boxes are tight to prevent water entry into the heater as shown. Water entry into the element will cause failure.



For the Boil Kettle only install the stand pipe in the drain fitting inside the kettle as shown. To install and remove the standpipe, simply use a racking cane to lower it into the drain hole and reverse for removal. This will keep the bulk of the settled hops and break material in the bottom of kettle and out of the chiller. Use of the stand pipe, while recommended, is optional.



Install the false bottom through the manway in the mash tun (MT) one segment at a time starting with the center section. Install the U-shaped securing clips between the sections to secure them as shown.

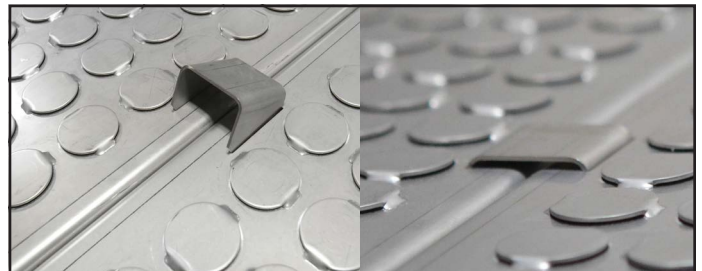

Brewery Ventilation

Ventilation needs for an electric brewhouse are fairly minimal as only the boil kettle needs to be ventilated. We recommend a traditional commercial kitchen vent hood be installed approximately 6.5 ft from the finished floor. General rules of thumb are in the table below. It is recommended that you consult your local codes and consult with a professional prior to purchasing or installing your ventilation equipment.

Total power for the Boil Kettle is 18 KW.

Rules of Thumb Summary	
Heat Load Factor	1 CFM per 100 BTU/hr (gas) or 34 CFM per KW (electric)
Hood Velocity Factor	50 CFM per ft ² of hood
Room Air Exchange Factor	CFM = Room Volume (ft ³) / 6 (you can generally disregard)
Hood Size	Overhang 6" minimum front and sides
Hood Height	32" above kettles – approx. 6.5 ft from floor


Control Panel Installation




Warning: Always follow ALL local codes and regulations for installation of this panel. We highly recommend hiring a certified electrician for this work! We offer this panel in both single phase and three phase options.

The back of the panel has 4 holes for affixing the panel to the wall of the brewhouse or onto a suitable stand. Mounting hardware or stand is not included. The image below indicates the locations of the main components.

IMPORTANT: Power demand for the brewhouse is 55A at 208V (three phase) or 79A at 240V (single phase). Select a main breaker setting for 20% above the appropriate amperage to avoid nuisance tripping or as directed by your local codes.

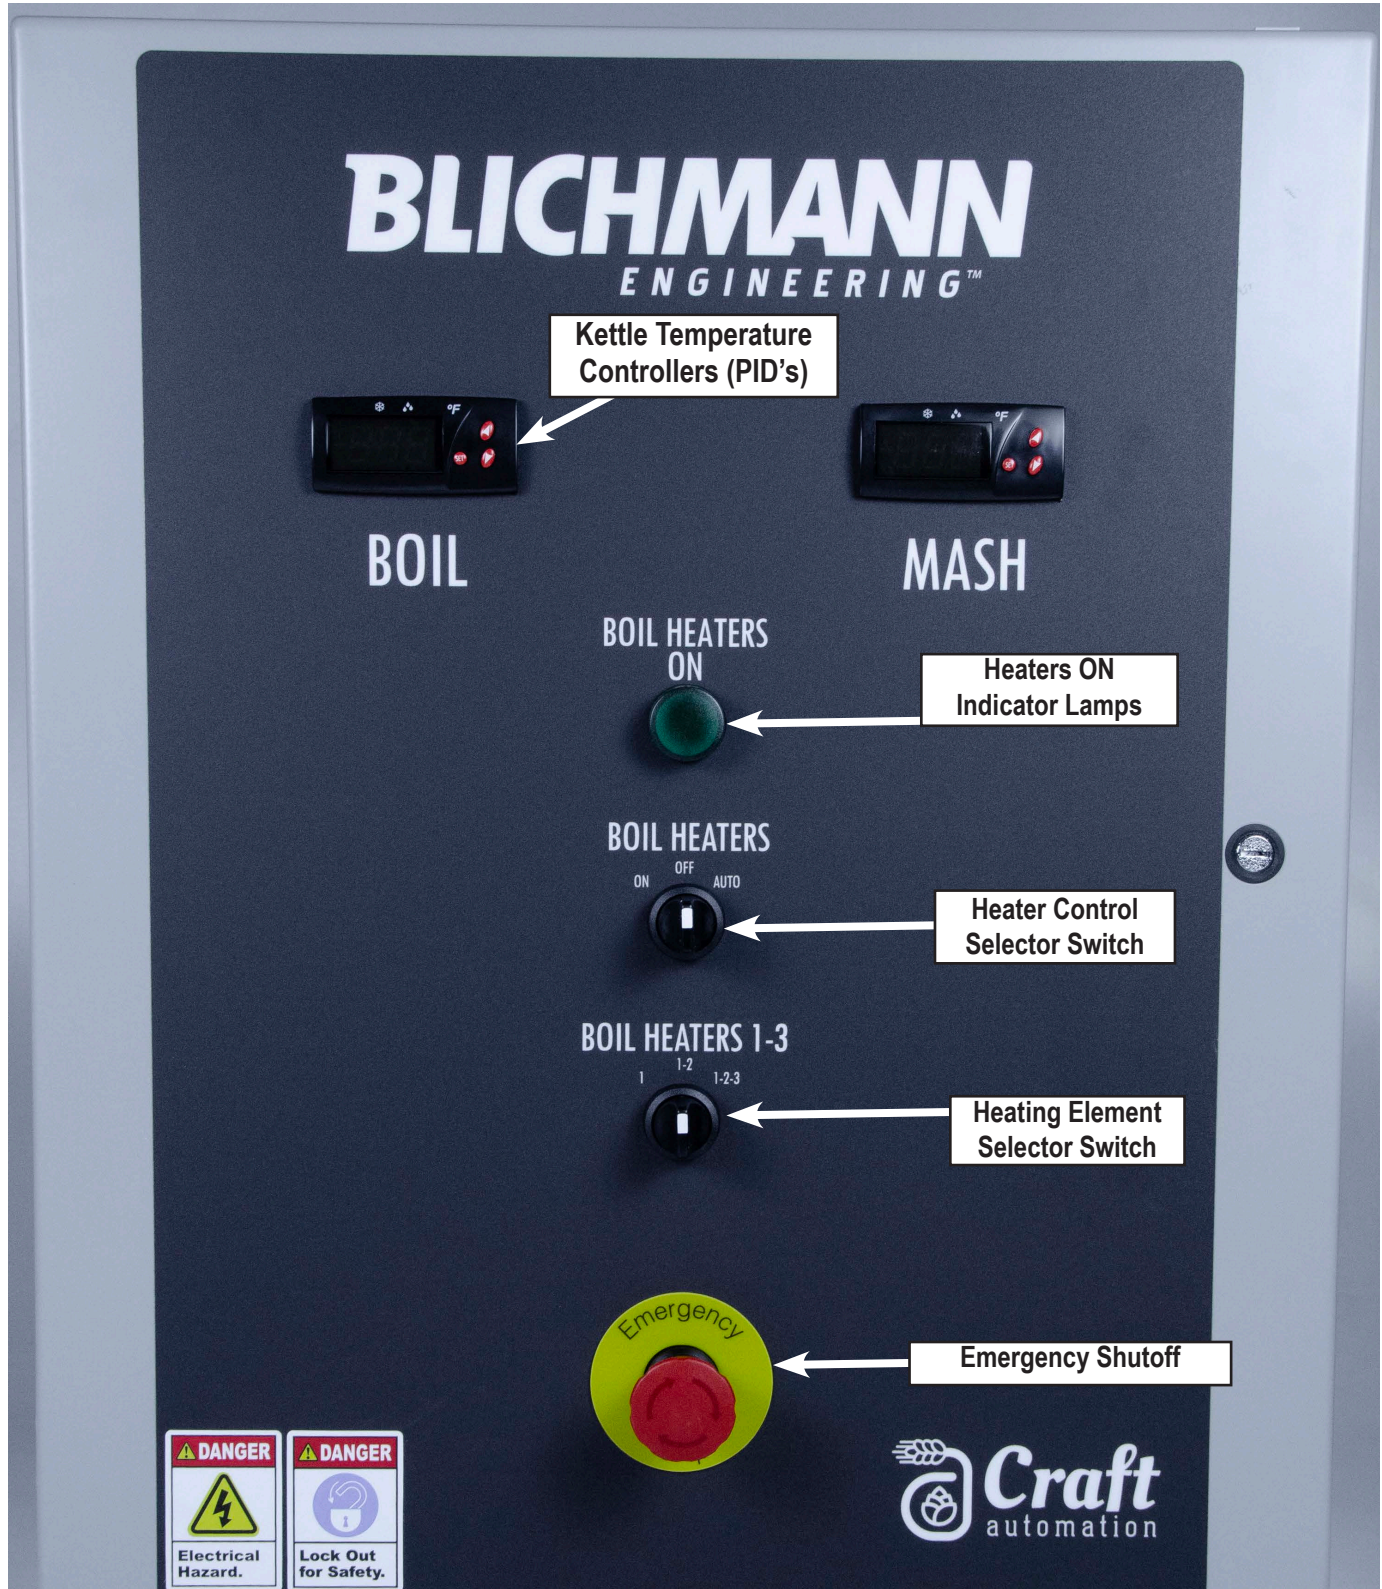

Panel pictured is a single phase controller. Locations of the components in the three phase panel will be the same.

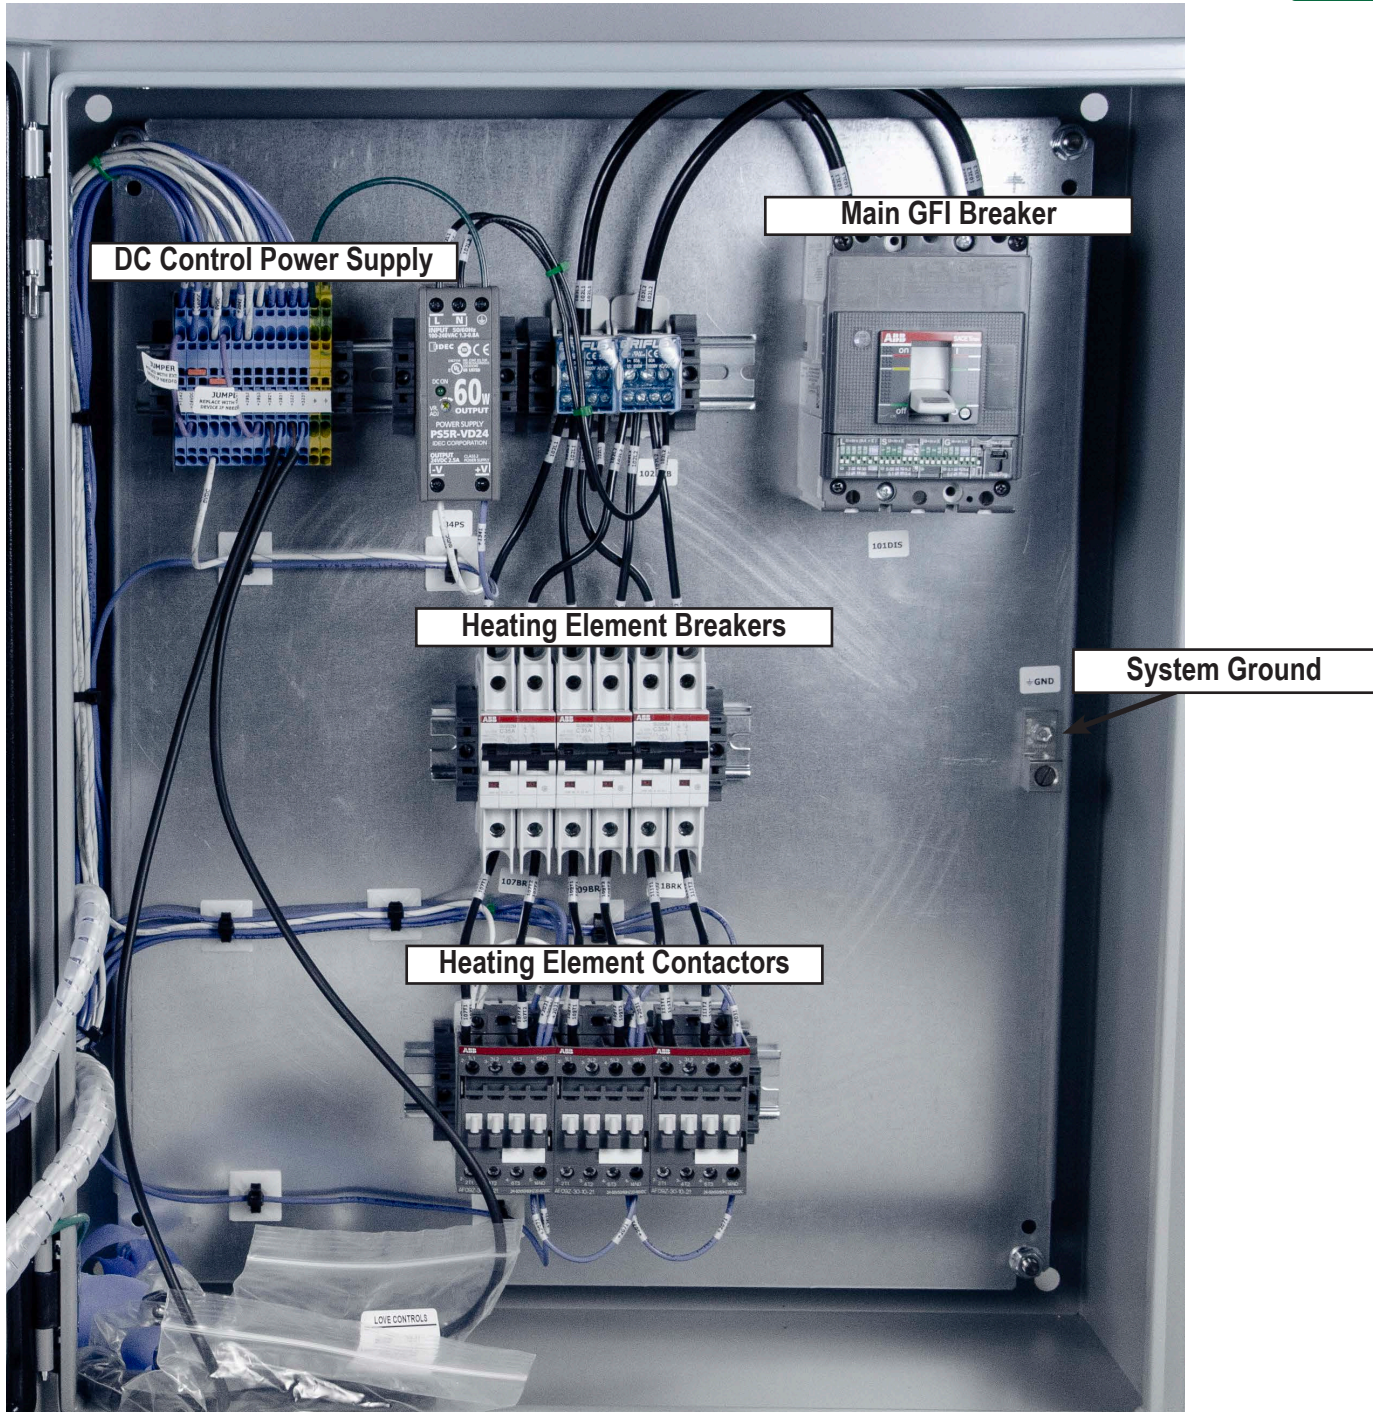

Main Power GFI Breaker – this industrial grade GFI (ground fault interrupting) breaker is the connection point for main power cables connected to the panel. Consult your local codes to determine if you can utilize this breaker as a main disconnect as well. In any case, we highly recommend a suitable disconnect switch be installed prior to the panel for safe servicing of the panel. Your contractor will need to punch a hole in your panel for the main power cable conduit in your desired location. Power demand for the brewhouse is 150A at 240V (single phase). Select a main breaker setting for 20% above the appropriate amperage to avoid nuisance tripping or as directed by your local codes.

RTD's – The brewhouse is equipped with two durable high precision PT100 temperature probes. The sensors come prewired to your controller panel.


RTD Wiring Inside Control Panel

Boil Kettle

Prewired to - 3021, 3031

Mash Tun

Prewired to - 3221, 3231

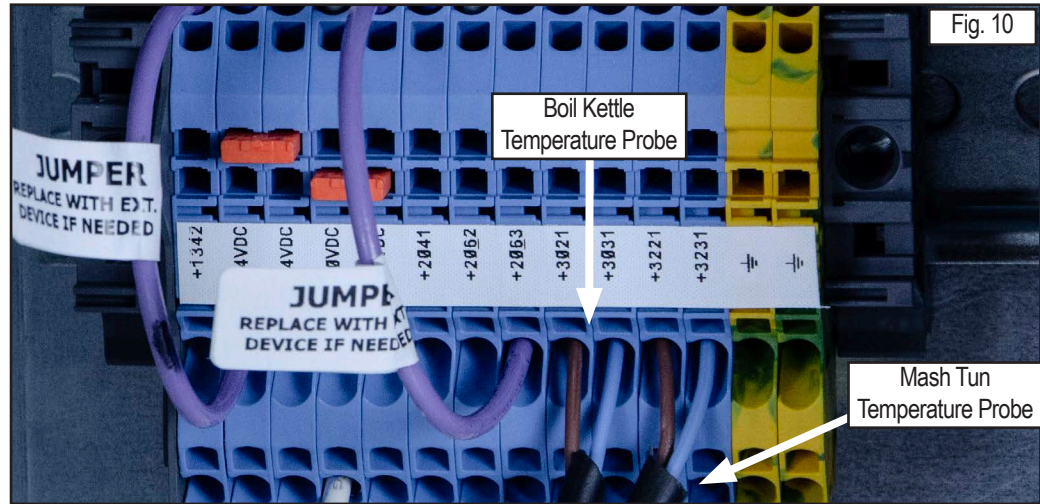


Heating Elements: The brewhouse is supplied with three 6,000 W ultra-low watt density heating elements. Each heating element will draw 25A at 240V (Single Phase) or 17A at 208V (3 phase). Each single phase element is pre-wired for 240V operation and has a pigtail with an L6-30P twist lock connector for easy removal for cleaning. Each three phase element is pre-wired for 208V operation and has a pigtail with an L14-30P twist lock connector for easy removal for cleaning. We recommend SJOOW type cable 10 ga minimum. Again, your local codes will dictate the cable type and gauge.

IMPORTANT: Always consult your local codes to determine what type of cable is acceptable, what gauge is required, and maximum lengths of flexible cable allowed.

CAUTION – Ensure the heater junction box is tight to keep any water out of the box. NEVER immerse the junction box or cord in liquids!

Float Switch – A float switch is provided to help prevent unintended energizing of the heating elements. It is vital that the heating elements be immersed in liquid prior to energizing them. Failure to immerse the heating elements will cause them to fail and potentially cause a fire! Wire from the float switch to the terminal block shown in the panel (**Fig. 10**). Wire to terminal 1 and 2 on the float switch. Polarity is not important. Use suitable 2 wire cable (18 ga recommended) for connection.

When wiring the float switch to the control panel use a continuity tester on the leads to ensure that the switch is open when in the down (empty) position, and is closed (has continuity) in the up (full) position. Low level float switch wires hook into the control panel terminals 2063 and 0VDC. If a jumper wire is installed in the panel, remove it when you install the switch wires. (**Fig. 10**)

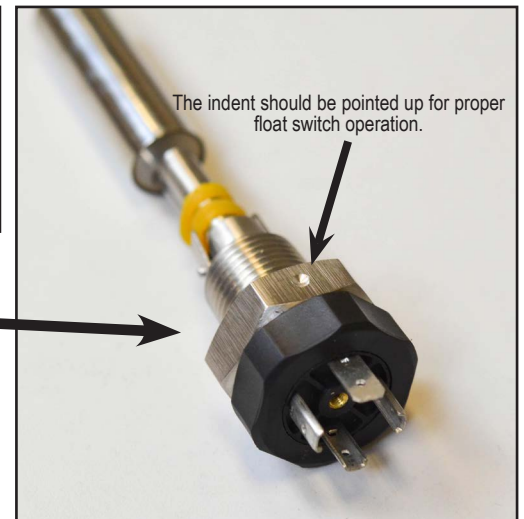

WARNING - DO NOT twist the float switch apart. This is NOT covered under warranty.

CAUTION: The low water level switch is a backup to an unintended energizing of the heaters. They are NOT intended to be normal shutoff switch and solely relied upon to keep the heaters from unintentionally energizing! Dry-fired heating elements are not covered under warranty!

Control Panel Operation

Reference the figures on page 4 for locations of components.

PID's – The PID controllers are pre-set for optimum heating rates and minimum overshoot. The corresponding large green lamp below the PID will indicate when the control is powering the heating elements. As the temperature approaches the set point the controller will automatically begin to cycle the heating elements on and off for a short period approximately every 30 seconds to maintain the set temperature. Typical stability is about +/- 1F. Note that the MASH PID is displaying temperature only and does not energize heating elements.

To change the set point press the UP/DOWN arrows until you reach your desired setting.

Heater Control Selector Switch – There are three positions for the power selector switch.

- ON** - Energizes the corresponding heating elements.
- OFF** - De-energizes the heating elements in all cases and prevents heater from energizing. Select this position as you begin to drain a tank or wish to prevent unintended powering of the heaters.
- AUTO** - Allows the PID to automatically turn on the heaters to maintain the desired set temperature.

Heater Power Selector Switch – The heater selector switch is used to select the total power input to your kettle. Each switch controls 3 heating elements. You may select, for example, element 1 only (1/3 power), element 1-2 (2/3 power), or 1-2-3 (full power). This is particularly helpful during the boil to control the boil intensity.

Emergency Stop – This switch disables all heater contactors in the panel and also can be used for ensuring your heaters do not inadvertently power on. For safety, install a padlock through the hole in the switch to prevent unauthorized operation of the panel.

WARNING: pressing the emergency stop button does NOT cut power from the inside of the panel! All internal components will be live! To service the panel, disconnect main power to the panel before opening the panel.

Brewhouse Operation

The hybrid design combines the conveniences of a traditional brewhouse with the simplicity, familiarity, and lower start-up cost of a homebrew system. This allows a fast and easy transition into commercial brewing with very few sacrifices! As such, startup and the learning curve is quite simple.

IMPORTANT: This manual is not intended as a brewing guide. If you are not intimately familiar with all grain brewing techniques we highly recommend the following texts from the Brewers Association:

- How to Brew (Palmer)
- Water (Palmer & Kaminski)
- Yeast (Zainasheff and White)
- Malt (John Mallet)
- For the Love of Hops (Stan Hieronymus)
- Brewing Classic Beer Styles (Zainasheff & Palmer)

Your mash tun, even though uninsulated, will lose less than 1 F/hr. Rarely do commercial breweries perform step mashing. Modern malts are highly modified and very little is to be gained by step mashing. Homebrew kettles, on the other hand, are so small that they lose heat quickly so temperature maintenance is common (RIMS/HERMS).



Lautering (sparging) and vorlauf are both performed using the CIP ball included with the system to gently distribute liquor or wort over the top of the grain bed. See the image below. Take care to avoid too fast of a runoff which may stick the mash. Note that the level gauge also acts as a manometer that measures the suction pressure on the grain bed. If the level in the gauge is more than 1/3 lower than the level in the tank you are drawing too quickly and will soon stick your mash.



IMPORTANT: Do NOT sparge or vorlauf at full pump flow or you are very likely to stick your mash, and your efficiency will suffer severely!

TIP: Your pumps are equipped with sanitary diaphragm valves that make easy work of balancing your flow rates.

Boiling: Once the level of the wort in your BK has reached your float switch, turn the corresponding heater control selector switch to ON

TIP: If the boil is too aggressive use the heater selector switch to de-energize one of the heating elements. Note that a proper boil is between a simmer and a surging boil. Shoot for a 3-5% boil off rate per hour.

IMPORTANT: To drive off DMS ALWAYS boil with the lid open!

Chiller

Sanitize the chiller by either pumping StarSan or similar copper friendly sanitizer through the chiller. Alternately the chiller may be submerged (fittings up) into a pail of sanitizer. Drain the chiller after the recommended time with the fittings facing down. Connect the chiller per the instructions on the nameplate.

Drain off the first gallon or so of wort from the boil kettle to a waste drain to eject any solids in the piping and to ensure only clear wort flows through the chiller to prevent plugging. Then divert the flow to the chiller. Adjust the wort flow and/or the cooling water flow to achieve the desired wort temperature to your fermentor.

IMMEDIATELY after use back-flush the chiller with hot water to eject any solids and wort. IMMEDIATELY soak the chiller fittings up in PBW or other copper friendly cleaning agents for 30 min or pump through the chiller. Rinse with hot water and then soak in sanitizer. Allow to drain fittings down, and then store with the chiller horizontal. Following this procedure consistently will give you a very long service life for your chiller.

Pumps: The pumps included with the system are seal-less magnetic drive pumps. They MUST NOT be run dry or the impeller bearing surface will be damaged! This is NOT covered under warranty. Ensure the hoses and pump head are filled with liquid before turning on the pump. If you hear a loud squeal, stop the pump immediately!

Caution: NEVER restrict the inlet to the pump. Always place flow throttling valves on the OUTLET of the pump ONLY. Failure to do this will cause cavitation in the pump possibly leading to failure of the impeller. If you hear any grumbling or grinding in the pump STOP IMMEDIATELY as this is cavitation. Cavitation failures are NOT covered under warranty.

Cleaning Your System:

Mash tun: Spent grains can easily be removed through the manway in the mash tun. Drain all remaining wort out of the bottom drain and then open the door. Utilizing a non-marring hoe (available in our maintenance kit) rake out the spent grains into a tub, also available through Blichmann Engineering. Remove the false bottom sections and spray them off with hot water and allow to dry. Spray excess grain from the sidewalls and bottom of the kettles with a hose.

BK/MT: Due to the easy access through the top of the relatively small tanks, and small size of the chiller and pumps, it is usually fastest to scour the kettles with a scrub brush mounted on a pole and spray them out with a hose. Optional cleaning tools are available through Blichmann Engineering to make this a fast and thorough job. Alternately, you can utilize one of the heated vessels to heat and hold your CIP (clean in place) chemicals and use one pumps to recirculate through the CIP ball and the second pump to return back into the chemical kettle. Tip your kettles forward so that all water drains out the bottom valve, leave the lid open, and allow the kettles to dry thoroughly.

Tip: Place your chiller in-line with the pump to clean it at the same time.

Helpful System Data

Typical heating rates are 0.8-1.5 F/min.

Expect about a 3-5% boil-off rate

Temperature loss in MT – less than 1F/hr

Temperature stability of control system approximately +/- 1 F

Blichmann Engineering Product Warranty

A. Limited Warranty

1. Blichmann Engineering warrants to the original purchaser that this product will be free from manufacturing defects in material and workmanship for a period of one (1) year from the date of purchase by the customer. Proof of purchase is required. Blichmann Engineering's obligation to repair or replace defective materials or workmanship is the sole obligation of Blichmann Engineering under this limited warranty.
2. The limited warranty covers only those defects that arise as a result of normal use of the product and does not cover any other problems, including, but not limited to, those that arise as a result of:
 - a. *Improper maintenance or modification;*
 - b. *Damage due to incorrect voltage or improper wiring by customer;*
 - c. *Operation outside of the product's specifications;*
 - d. *Carelessness or neglect to operate the product in accordance with instructions provided with the product;*
 - e. *Damaging the tamper label on the product;*
 - f. *Damage by over-tightening the fasteners;*
 - g. *Failure to follow cleaning and / or maintenance procedures; or*
 - h. *Exceeding published operational temperatures.*
3. Blichmann Engineering reserves the right to request delivery of the defective component for inspection before processing the warranty claim. If Blichmann Engineering receives, during the applicable warranty period, notice of a defect in any component that is covered by the warranty, Blichmann Engineering shall either repair or replace the defective component with a new or rebuilt component at Blichmann Engineering's option.
4. Blichmann Engineering must be notified within seven (7) days of the delivery date of any shipping damage. Customer is responsible for shipping damage outside of this time period. Approval for return must be provided by Blichmann Engineering prior to any return. Customer is responsible for keeping all original packaging material for warranty returns. Blichmann Engineering is not responsible for damage from improperly packaged warranty returns, and these repair costs will be the sole responsibility of the customer. Shipping costs for warranty returns are covered only for the contiguous United States.
5. Blichmann Engineering's limited warranty is valid in any country where the product is distributed.

B. Limitations of Warranty

1. Any implied warranty that is found to arise by way of state or federal law, including any implied warranty of merchantability or any implied warranty of fitness, is limited in duration to the terms of this limited warranty and is limited in scope of coverage to this warranty. Blichmann Engineering disclaims any express or implied warranty, including any implied warranty of fitness for a particular purpose or merchantability, on items excluded from coverage as set forth in this limited warranty.
2. Blichmann Engineering makes no warranty of any nature beyond that contained in this limited warranty. No one has authority to enlarge, amend, or modify this limited warranty, and Blichmann Engineering does not authorize anyone to create any other obligation for it regarding this product.
3. Blichmann Engineering is not responsible for any representation, promise, or warranty made by any independent dealer or other person beyond what is expressly stated in this limited warranty. Any selling or servicing dealer is not Blichmann Engineering's agent, but an independent entity.

C. Limitations of Liability

1. The remedies provided in this warranty are the customer's sole and exclusive remedies.
2. Except for the obligations specifically set forth in this warranty, in no event shall Blichmann Engineering be liable for direct, indirect, special, incidental, or consequential damages, whether based on contract, tort, or any other legal theory and whether or not advised of the possibility of such damages.
3. This warranty does not cover, and in no event shall Blichmann Engineering be liable for, travel, lodging, or any other expense incurred due to manufacturing defects in material and workmanship, or any other reason.
4. Any performance of repairs after the warranty coverage period has expired or performance of repairs regarding anything excluded from coverage after this limited warranty shall be considered good-will repairs and they will not alter the terms of this limited warranty, or extend any warranty coverage period.
5. Venue for any legal proceedings relating to or arising out of this warranty shall be in Tippecanoe County, Indiana, United States, which courts will have exclusive jurisdiction.

D. Local Law

1. This warranty gives the customer specific legal rights. The customer may also have other rights that vary from state to state in the United States or other countries.
2. To the extent that this warranty is inconsistent with local law, it shall be deemed modified, only to the extent necessary to be consistent with such local law.

This product uses food grade materials anywhere the product touches the beverage.

Warning: This product contains or may contain chemical(s) known to the State of California to cause cancer, birth defects, or other reproductive harm.